

OpDAQ Systems Torque-Trak Revolution Installation Kit Install a Binsfeld's Torque Trak Revolution in few steps!


Include in the box:

- 1/4" inch Laser cutted « U » bracket
- TT Revo order specific temporary positioner/spacer
- Nuts & Bolts bag

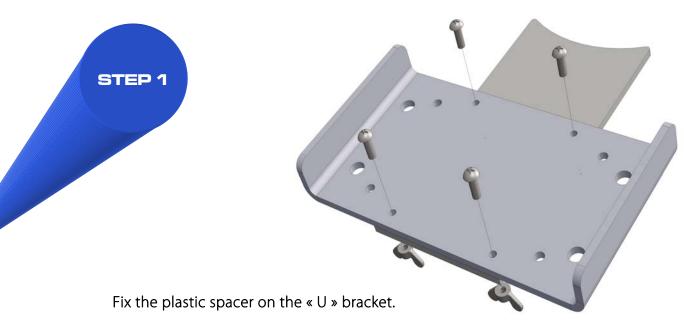

Tips: Bolts can be tightened by hands.

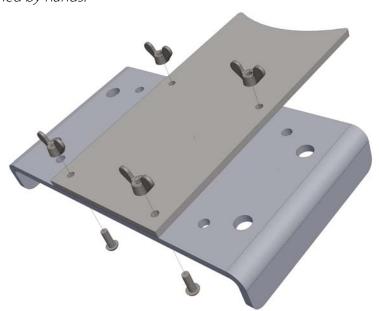


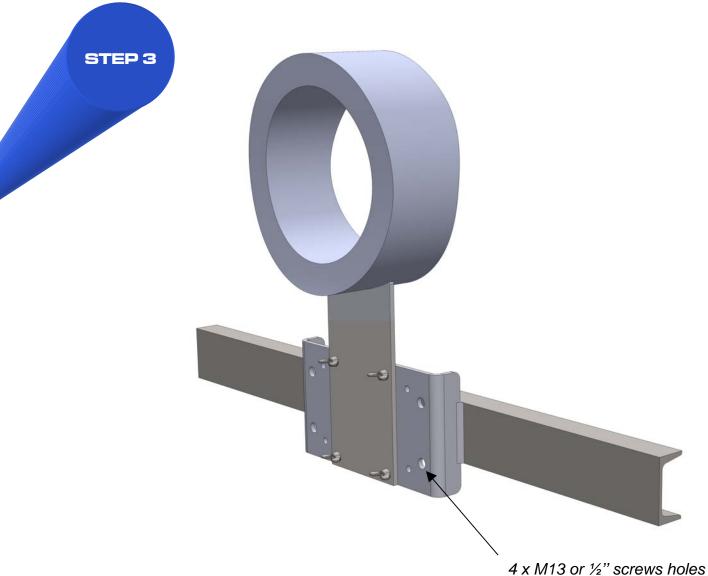

Mate the spacer with the shaft and weld the bracket on a previously installed steel beam.

You can also use M13 or ½" bolts option to mate with a non-ferrous structure. (aluminium, fiberglass, etc..)


Tip: Flip the bracket for a bolted mounting.

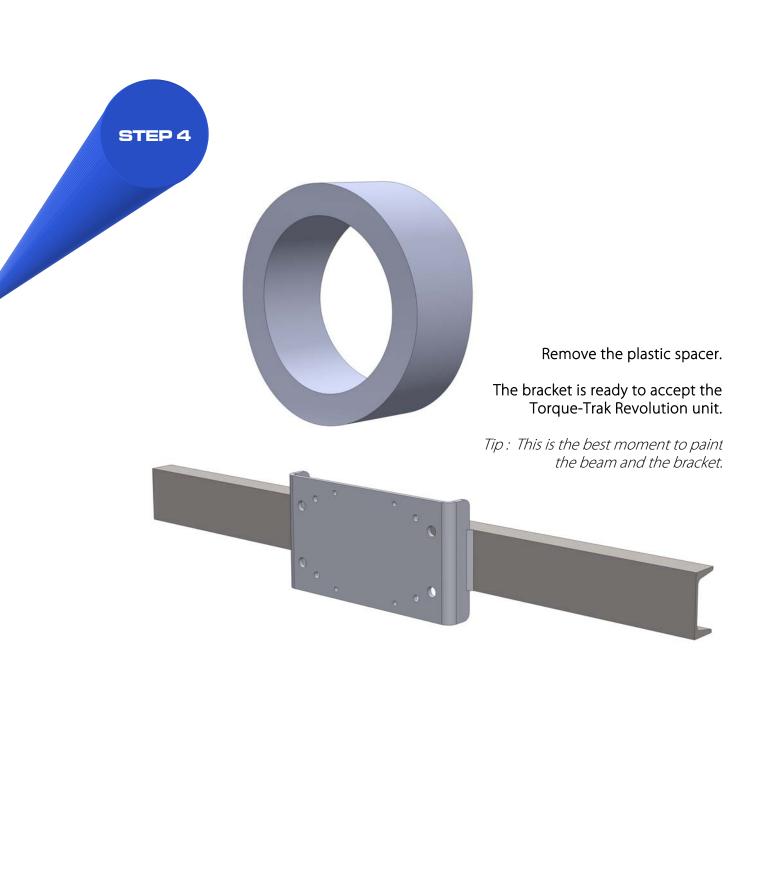





Install the Torque-Trak Revolution enclosure by using the 5/16" hardware provided with the kit.

Tip: This is a close fit tolerance assembly, put all the screws before tightening all the nuts.

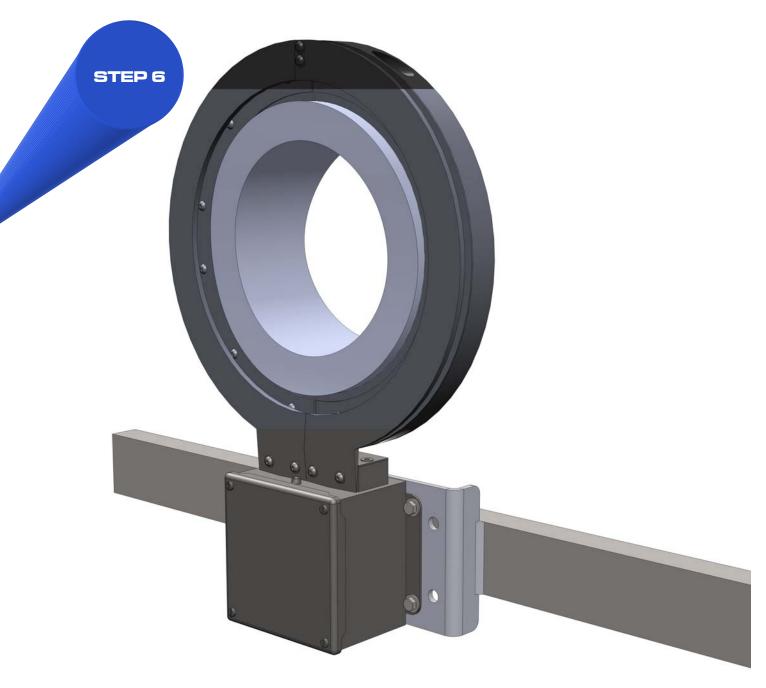

Please refer to the Torque-Trak Revolution manual for the next steps of the installation.

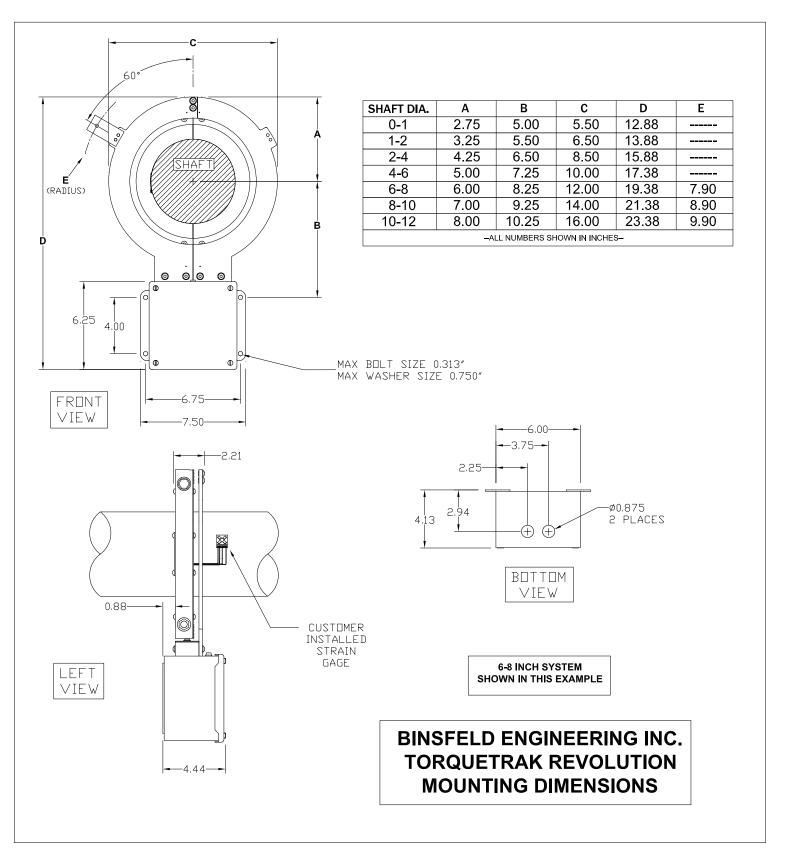

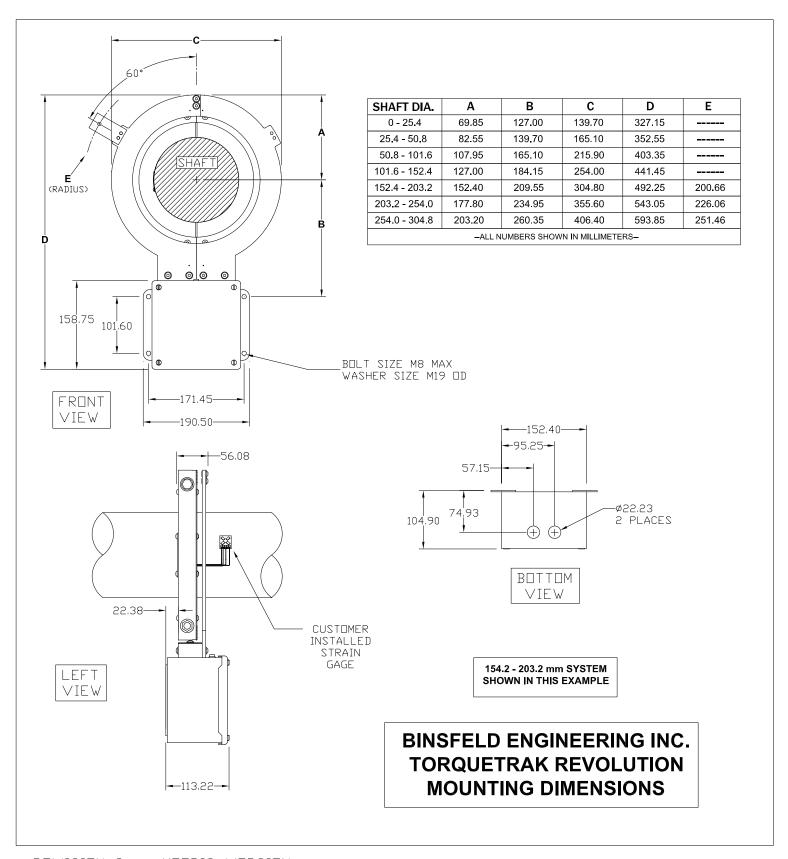

REVISION 9 -- METRIC VERSION

